




- Horizontal blades fixed on 0° deflection with 2/3" spacing.
- Roll-formed aluminum blades provide stylish appearance.
- Pressure-fit nylon pivot pins provide rattle-free performance.
- High-quality aluminum extruded frame.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 22" in length.
- Available with durable powder coat finish.

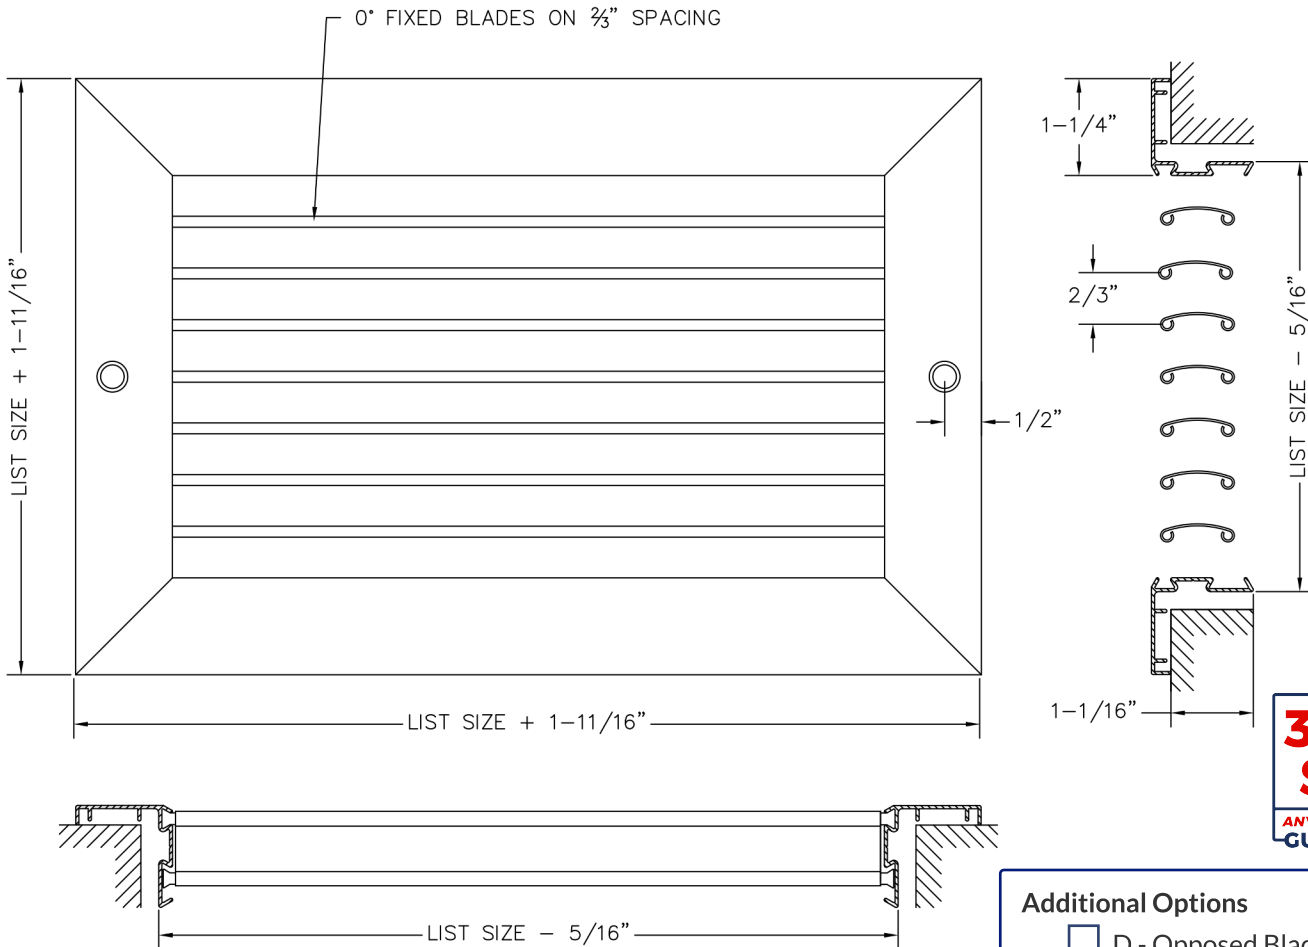

**3 DAY
SHIP**
ANY SIZE. ANY MODEL.
GUARANTEED

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ ☐ inches ☐ mm

3. Select a Finish

- ☐ W - White
- ☐ S - Silver
- ☐ M - Mill

4. Select a Lead Time

- ☐ 3 Day Ship
- ☐ Next Friday
- ☐ Standard Delivery

Additional Options

- ☐ D - Opposed Blade Damper
- ☐ TB - No Screw Holes
- ☐ IS - Insect Screen
- ☐ AA - All Aluminum

Project / Location:

Architect:

Engineer:

Contractor:



Scan for more
product
information.